


LED FRAME LIGHT

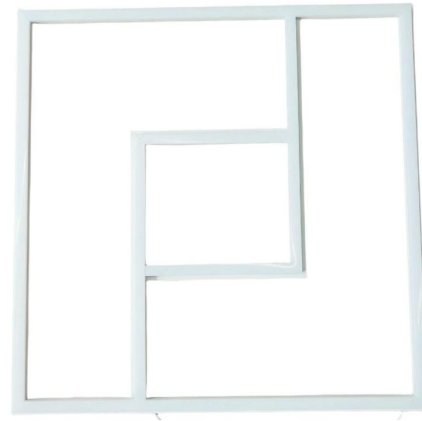

PRODUCT OVERVIEW

The frame light give a beautiful, uniform and soft light on the surface.

Depending on your preference and design,you can assemble a varity of different shapes to make room lighting full of art.

KEY FEATURES


- Wattage adjustable and CCT tunable.
- The frame houses LED chips around 4bars,nice and soft illumination
- High lumen efficient 125lm/w.
- Frame recessed in the ceiling installation,remain the original ceiling,no need other processing
- ETL listed.
- 5 years warranty.
- Full series:2*2FT,2*4FT,1*4FT
- Separated driver,more flexible for installation.
- 0-10V dimmable in standard configuration.

APPLICATION


- Office/shool
- Subway&train station
- Supermarket,etc

PERFORMANCE SUMMARY

Construction & Materials		
Diffuser	PC optical cover	
Housing	6063 Aluminum Frame	
Finish	Pure White	
Environmental System		
Work Environment	Suitable for dry and damp location	
Operating Temperature	-20℃ to 45℃	
Parameter		
CRI	>85	
Efficacy	125lm/w-140lm/w(125lm/w on average)	
CCT	Single color:3000K,3500K,4000K,5000K,5700K,6500K 3CCT tunable:4000K-5000K-6500K 3CCT tunable:3000K-4000K-5000K	
Input Voltage	100-277Vac; 50/60HZ	
Wattage	2*2FT	40W
	1*4FT	30W
	2*4FT	60W
Dimming	0-10V dimming	
Certification	cETLus	




Model one



Model two

DIMENSIONS

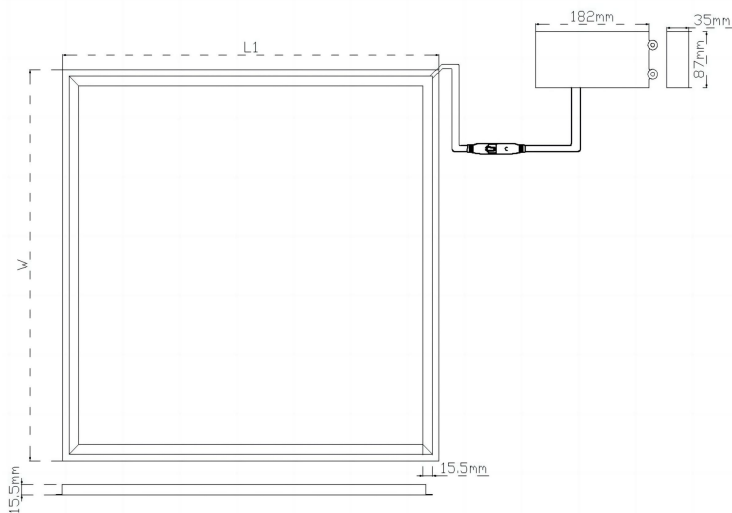

INSTALLATION

Step 1. Take off one ceiling tile that you want to install this light on.

Step 2. Place the light on the T-bar carefully and make sure it is correctly in place and secure.

Step 3. Connect the driver with the light by the connector self attached.

Step 4. Do wiring inside the driver box

