



|                   |                     |                  |                   |
|-------------------|---------------------|------------------|-------------------|
| <b>Size</b>       | 6.3" x 6.3" x 42.1" | <b>Lumens</b>    | 2750lm            |
| <b>Watts</b>      | 12W-16W-22W         | <b>CCT</b>       | 3000K-4000K-5000K |
| <b>Voltage</b>    | AC120-277V          | <b>IP Rating</b> | IP65              |
| <b>Dimming</b>    | 0-10V               | <b>Materials</b> | Aluminum, PC      |
| <b>Beam Angle</b> | N/A                 | <b>Finish</b>    | Bronze            |
| <b>CRI</b>        | >80                 | <b>Lens</b>      | Clear             |
| <b>PF</b>         | ≥0.9                | <b>Lifespan</b>  | 50,000 hrs        |

SARIN LED BOLLARDS are an excellent choice to provide long lasting, energy efficient LED lighting for your outdoor spaces. Featuring a square silhouette, these lights are perfect for exterior pathways and open spaces, the lights feature a tall, modern profile. The bollard has an aluminum housing, providing corrosion resistance ideal for areas with heavy traffic.

This decorative LED bollard light fixture is ideal for exterior commercial, hospitality and municipal applications.

Photocell Light Sensors are available, allowing lights to automatically activate the lights when dark.

## OVERVIEW

**Tunable:** 3000K-4000K-5000K

**Applications:** Outdoor IP65

**Efficacy:** 125lm/W

**Dimming:** 0-10V

**LED Type:** Lumileds 2835

**Lens Type:** Clear

**Driver:** Weledpower

**Operating Temp:** -40° to 113° F

**Operating Humidity:** 10-65% RH

**Lifespan:** 50,000 Hours

**Warranty:** 5 Years



## FEATURES

- Adjustable CCT, Wattage, and Dimming
- Protected from the elements with an IP65 rating making it suitable for wet conditions
- Powder Coated Bronze finish looks great in any location
- Durable aluminum housing protects from wear and tear

## OPTIONAL ACCESSORIES

- Light Detecting Photocell Sensor


## PHOTOMETRICS:

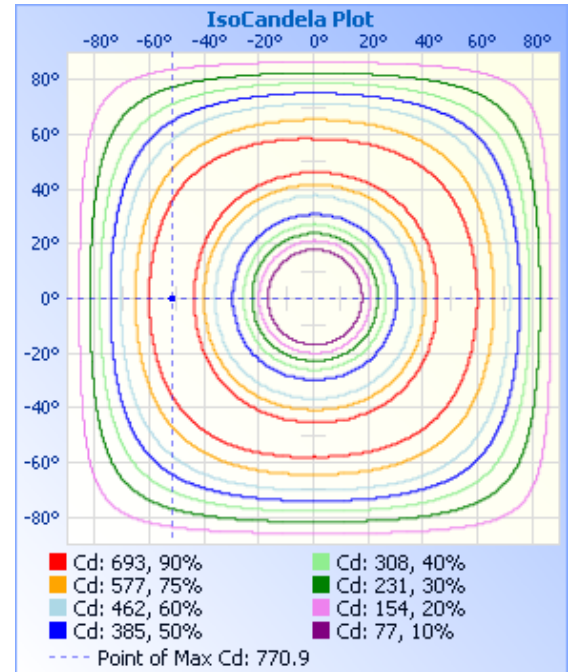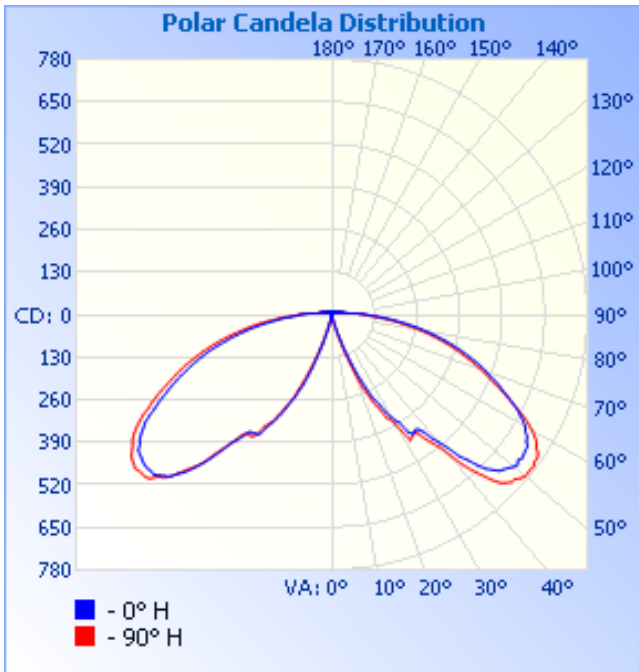

## IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.

## DIMENSIONS:

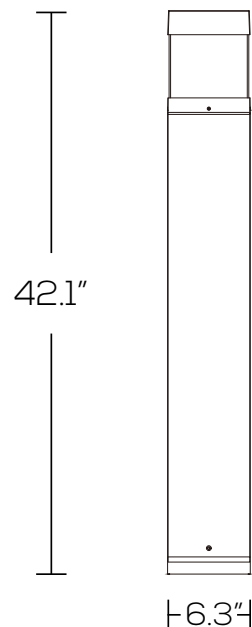



NEX GEN LED LIGHTS AND SIGN  
+1 817-800-2132  
12450 East Fwy Suite 100, Houston,  
TX 77015, United States

ORDER FORM:

(\*) Special Order/Not Commonly Stocked

Custom Model Assembly

| Fixture                                     | CCT                                         | Watts                                   | Voltage                                      |
|---------------------------------------------|---------------------------------------------|-----------------------------------------|----------------------------------------------|
| <input checked="" type="checkbox"/> BLS22SS | <input checked="" type="checkbox"/> Tunable | <input checked="" type="checkbox"/> 22W | <input checked="" type="checkbox"/> 120-277V |

SES-BLS22SS-CCT-22  
Example Model Number

Quantity

|     |   |         |   |         |   |       |   |         |
|-----|---|---------|---|---------|---|-------|---|---------|
| SES | — | BLS     | — | Tunable | — | 22    | — | 120-277 |
|     |   | Fixture |   | CCT     |   | Watts |   | Voltage |