

NEX GEN LED LIGHTS AND SIGN

+1 817-800-2132

12450 East Fwy Suite 100, Houston,
TX 77015, United States



AM



DM



A&DM

Note:

The letter "a" can be can be 2 letters represent lamp colors; "BH = Black 、 WH=White 、 BR=Brown or Customized"

The letter "b" can be "AM", "DM", "A&DM" or "FM" to represent type of Mounting Means;

The letter "c" can be "G" for wire guard or blank for not provided;

The letter "d" can be "10SP" or "20SP" for Surge-Protective Device type provided or blank for not provided;



The letter "e" can be any numbers to represent CCT.

Advantage:

- UL cUL DLC certificate
- Input voltage 120-277Vac
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury
- Output constant current lever can be adjusted through output cable with 1-10V.

Application:

- Gymnasium;
- Square plaza;
- Shipyard, Airport ,wharf;
- High mast and Contour lighting, etc.

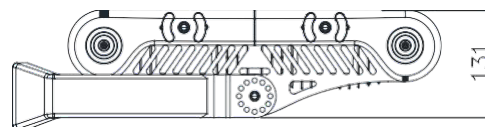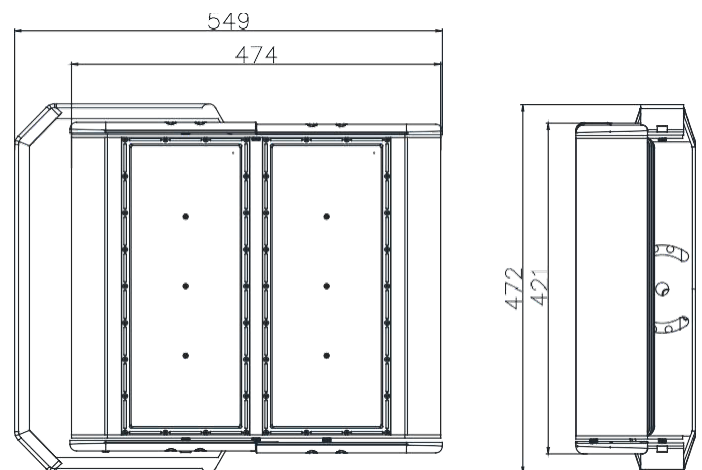




SPECIFICATIONS

OPTICAL	Input Power (Tolerance : $\pm 10\%$)	500W
	Color Temperature	3000K/3500K/4000K/4500K/5000K/5700K
	Efficacy (Tolerance : -3%)	125-135LM/W
	CRI	>70
	Color Consistency	< 6 Steps (or < 6 SDCM)
	BUG	B4-U0-G5
	Distribution Pattern	40°
	Beam Angle (50%) (Tolerance : $\pm 15\%$)	40 Degree
ELECTRICAL	Input Voltage and Frequency	120-277VAC, 50/60Hz
	PF (Tolerance : -3%)	≥ 0.9
	THD (Tolerance : $+5\%$)	$\leq 20\%$
	Flicker Percent	$< 5\%$
	Driver Brand	SOSEN
	Driver Model	SS-240VA-56B*2
	Driver Surge protection	L/N-PE: 10kV, L-N: 6kV
	Dimming	1-10V dimming standard
	Optional Accessory	Surge-protective Device,
MATERIALS	LED Brand	Seoul
	LED Type	SMD3030
	LED QTY	576 PCS
	Housing	Aluminum
	Housing Color	Brown, Black, or Customized
	EPA	2.15 ft ²
	Waterproof Rating	WET (IP65)
OTHERS	Operating Temperature	-40°C TO 45°C
	Storage Temperature	-40°C TO 80°C
	Operating Humidity	20% - 90% RH
	Storage Humidity	10% - 95% RH
	Warranty	5 years warranty with 24/7 operating hours Luminaire lifetime at 25°C .

PACKAGE

Bracket Type	Carton Size	Qty / Carton	Net Weight / Carton	Gross Weight / Carton
AM	920*542*250 MM	1 PC	20 KG	22.5 KG
DM	920*542*250 MM	1 PC	20.1KG	22.6 KG
A&DM	920*542*250 MM	1 PC	20.3 KG	22.8 KG
FM	760*542*250 MM	1 PC	18 KG	20.5 KG

Tolerance of Carton Size: ± 15 MM, Tolerance of Weight: $\pm 10\%$.

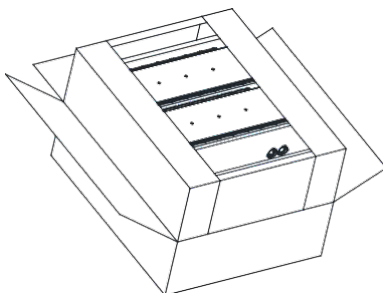

Light Distribution Testing Parameters

Luminaire Property

Luminaire Manufacturer:
Luminaire Category:
Lamp Catalog:
Number of Lamps:
Luminous Length (mm):
Luminous Height (mm):
Current: 4.163 A
Power Factor: 0.998


Luminaire Description:
Lamp Description:
Lumens per Lamp:
Luminous Width (mm):
Voltage: 120.0 V
Power: 498.56 W

Photometric Results


IES Classification: Type I
Total Rated Lamp Lumens: 67546.6 lm
Efficiency: 100%
Upward Ratio: 3%
C0r0 Intensity: 112751.77 cd
Pos of Max. Intensity: H90 V1

Longitudinal Classification: Very Short
Measurement Flux: 67546.6 lm
Downward Ratio: 97%
Luminaire Efficacy Rating (LER): 135.53
Max. Intensity: 113267.15 cd

Luminous Intensity Distribution Curve

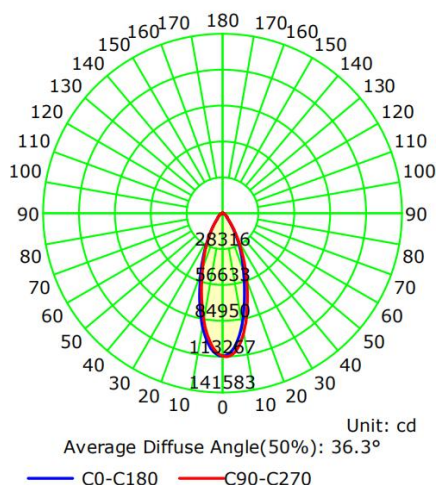

Illuminance at a Distance

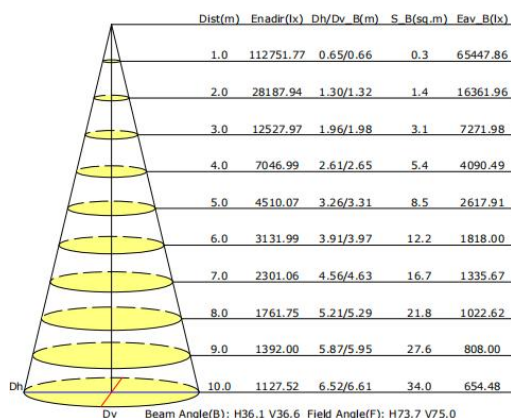

NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.