

NEX GEN LED LIGHTS AND SIGN
+1 817-800-2132
12450 East Fwy Suite 100, Houston,
TX 77015, United States


Features:

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- Ultra bright RED or GREEN LEDs.
- Built-in 1.2V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Five years warranty for the electrical parts and housing.
- Three years warranty for battery.

NEW COMPACT SIZE LED EXIT SIGN



Dimension




Charging time	24h
The AC voltage	277V/60Hz
AC charging current	10-25mA
Discharge time	• 90mins
Discharge current	680mA±80mA
Luminous flux	4.2031lm
• • Golor temperature	1001K
• • Packing information	40x33x23cm/6pcs 7.8/6.8kgs

NEX GEN LED LIGHTS AND SIGN
+1 817-800-2132
12450 East Fwy Suite 100, Houston,
TX 77015, United States

NEW COMPACT SIZE LED EXIT SIGN

Spectra:

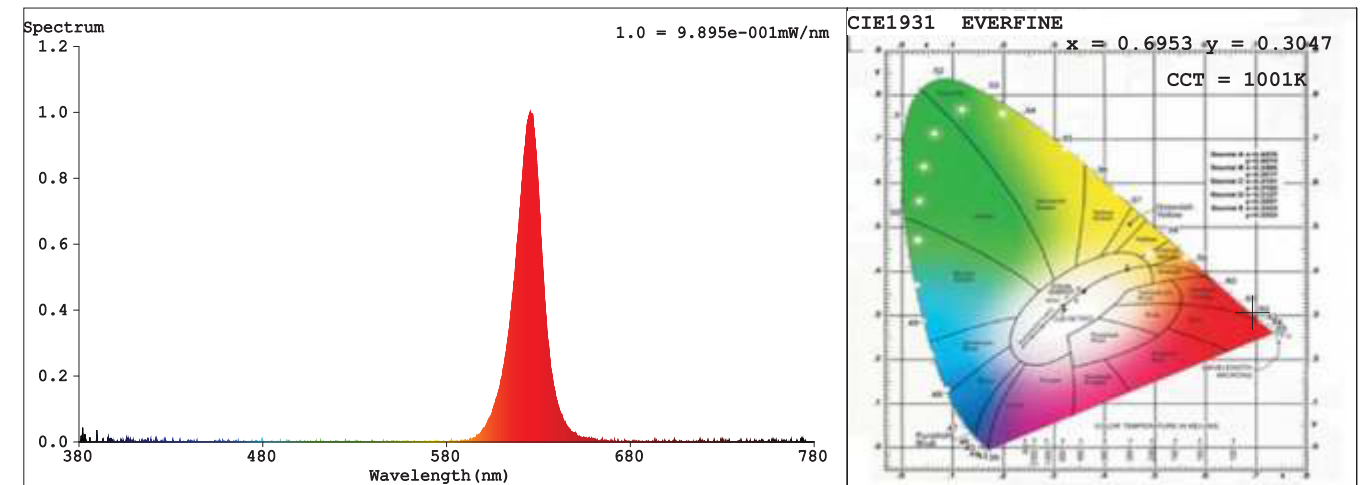

Spectral-Distribution

CIE1931 •Chromaticity•Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.6953$ $y = 0.3047$ / $u' = 0.5281$ $v' = 0.5208$ ($duv = -7.49e-02$)
CCT= 1001K Prcp WL: $\lambda_d = 621.9nm$ Purity=100.0%
Peak WL: $\lambda_p = 626nm$ FWHM: =15.6nm Ratio: R=98.7% G=1.4% B=-0.1%

Render Index: Ra = 2.5

R1 = -3 R2 = 75 R3 = 22 R4 = -43 R5 = -13 R6 = 87 R7 = -8
R8 = -97 R9 = -271 R10 = 66 R11 = -30 R12 = 75 R13 = 23 R14 = 54 R15 = -53

Photometric & Radiometric Parameters

Flux = 4.2031 lm Eff. : 2.51 lm/W Fe = 18.194 mW

Electrical parameters

V = 120.2 V I = 0.01892 A P = 1.674 W PF = 0.7359 F = 49.99 Hz