



Triac Dim



No flickering



-35°C - 35°C
Operating



3 Year
Warranty



Aluminum Body



Cooling Hole Design



Bright Epistar Chip


Specification

Power Factor(PF)	>0.90
Lumen Efficiency	Around 90Lm/W
CRI	Minimum 80
CCT	Single CCT / 3 CCT Adjustable(3000-4000-5000K)
Optional Beam Angle	15° / 24° / 36°
Class cations	Class1
Normal Voltage	100-140V
Working temperature	- 35°C < Ta < 35°C
Warranty	3 year
Surge Protection	2 KV
Track adapter	HALO System/ Three wires



OPTICS

Tech. Support: Tell us the room length, width, height and the usage. We have an engineer team to respond the DIALUX simulations for lights quantity calculation and effects. .ies files are available upon request.

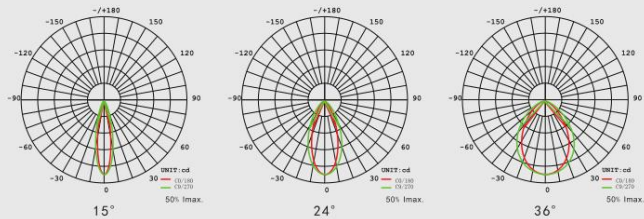

Features&Application

- 50% higher energy saving rate than the traditional metal halide lamp.
- No flicker , no dazzle , meanwhile very healthy to the eye.
- Dimmable: Compatible with 90% triac dimmer in whole market.
- Environmental protection: Meet RoHs requirements; Contains no plumbum and tribute elements.

Shopping malls , bo cultural relics exhibition hall, chain stores, brand business hall, professional Windows, counters and other key lighting places.



Kitchen



Living Room



Product Dimension



Power	A Inch	B Inch	C Inch	D Inch
10W	2.36	4.92	5.26	1.38
20W	2.99	5.23	5.89	1.38
30W	3.46	5.79	6.02	1.38