


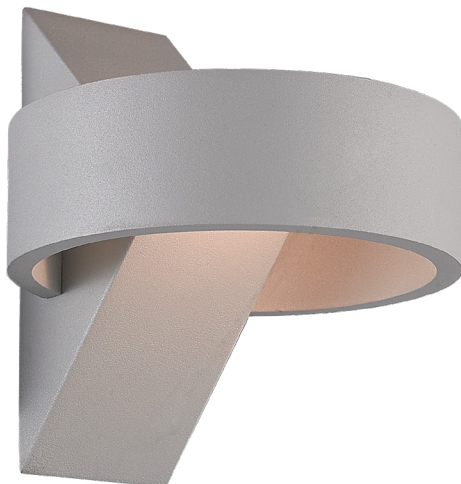

Size	4.7" L x 5.1" W x 5.3" D	Lumens	280lm
Watts	6.5W	CCT Tunable	3000K-4000K-6500K
Voltage	100-240V	IP Rating	IP54
Dimming	Non-Dimming	Materials	Aluminum, PC
Beam Angle	187.5°	Finish	Light Gray
CRI	>80	Lens	Clear
PF	≥ 0.5	Lifespan	30,000 Hours

SARIN LED CCT Wall Sconces add functional lighting with a design element to any outdoor area. Constructed from solid aluminum, this contemporary light features a clear crackle glass shade that provides a unique light pattern on surrounding walls when lit. With an IP Rating of IP54, this wall light is highly weather resistant.

This decorative LED wall sconce is ideal for exterior walls on hotels, homes, and offices.

LED Wall Sconces are safe to use in wet locations that come in direct contact with rain and water.

OVERVIEW

CCT Tunable: 3000K-4000K-6500K

Applications: IP54

Efficacy: 65-75 lm/W

Dimming: Non-Dimming

LED Type: SMD2835

Lens Type: Clear

Operating Temp: -4° to 104° F

Operating Humidity: 10%-65% RH


Lifespan: 30,000 Hours

Warranty: 3 Years

FEATURES

- Protected from the elements with an IP54 rating making it suitable for wet conditions
- Durable aluminum housing protects from wear and tear

PHOTOMETRICS:


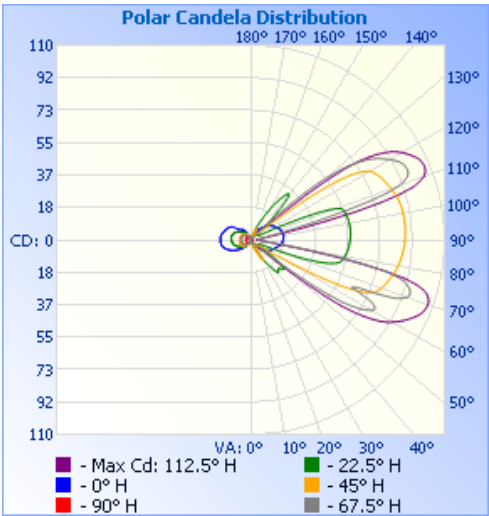


Illuminance at a Distance

	Center Beam fc	Beam Width
1.7ft	0.11 fc	1.5 ft 0.9 ft
3.3ft	0.03 fc	2.8 ft 1.7 ft
5.0ft	0.01 fc	4.3 ft 2.6 ft
6.7ft	0.01 fc	5.8 ft 3.5 ft
8.3ft	0.00 fc	7.1 ft 4.4 ft
10.0ft	0.00 fc	8.6 ft 5.3 ft

■ Vert. Spread: 46.5°
■ Horiz. Spread: 29.7°

DIMENSIONS:

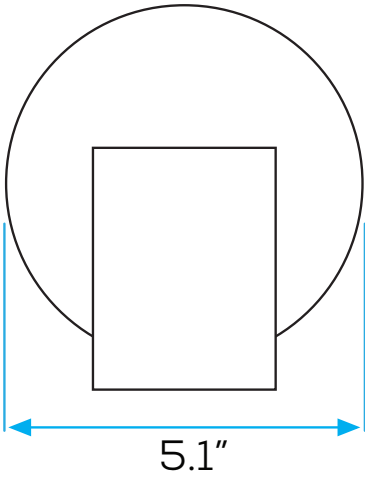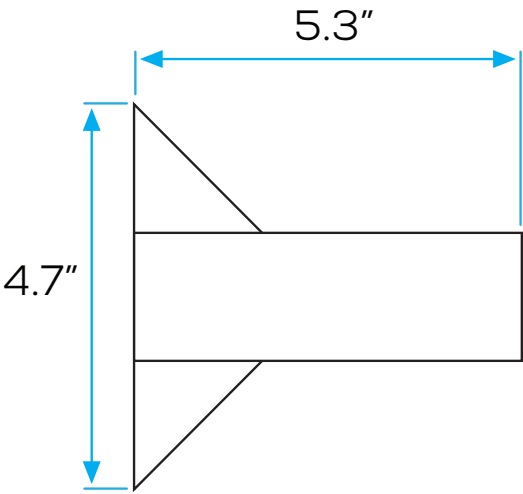

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

CCT

☒ Tunable

Watts

☒ 6.5W

Beam Angle

☒ 187.5°

Voltage

☒ 100-240V

Quantity

Tunable — 6.5W — 187.5° — 100-240V

CCT

Watts

Beam Angle

Voltage