



LED EMERGENCY RUNNING MAN SIGN / COMBO



Activate Windows
Go to Settings to activate Windows.

Features:

- Durable heavy duty steel housing.
- Innovative, easy installation in minutes.
- Universal j-box mounting pattern.
- 120V/347VAc Dual voltage operation
- 2X3W COB ultra bright LED lamp heads for emergency mode.
(CALEDCXTEWRW/CALEDLXTEWRW)
- Built-in 4.8V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.(CALEDXITWRW)
- Built-in 6V12Ah Lead acid battery for minimum 90 minutes emergency operation.(CALEDLXTEWRW)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- CSA listed.
- 0° to 40°C indoor damp location listed.
- Three years warranty.

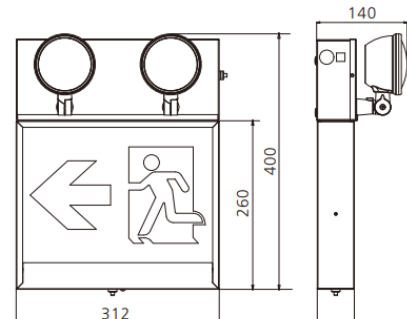

ALL DIMENSIONS IN INCHES