




Introduction

- For retrofit or new construction installation
- Universal housing compatibility
- Adjustable lumen output and Color – 3 defined light levels, Power(22W/15W/10W),Color(3000K/4000K/5000K CCT)
- Easy fit installation – Spring-action housing clips
- Universal voltage 110-277V



ORDERING INFORMATION


Adjustable Lumen Output and Color



This commercial downlight features adjustable lumen output for three distinct lumen levels equivalent to various CFL lamp combinations. Simply adjust the lamp power or color to the desired lumen output by sliding the selector switch on top of the fixture.

Easy-Fit Installation

The adjustable housing clips allow for installation in a large range of commercial and architectural housings ranging from 6.0"-7.4" (153-190mm). These spring-action clips push up easily and fit securely for both retrofit and new construction installations.

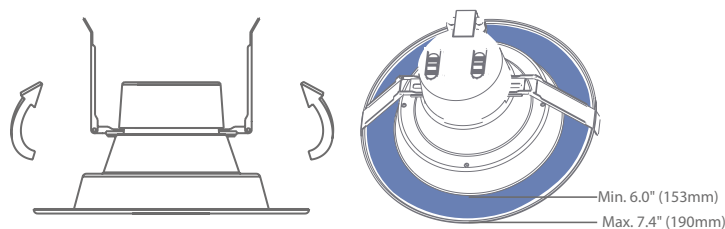


Electrical Data


	INPUT (VAC)	CURRENT	POWER (W)	LEDS	LED CURRENT	CRI	CCT
		0.08	10		0.05		3000
	110-277	0.12	15	60	0.07	90	4000
		0.18	22		0.11		5000

SIMPLE RETROFIT OR ECONOMICAL NEW CONSTRUCTION INSTALLATION


Retrofit Installation




Attach safety clip




Bypass ballast & wire to j-box



Adjust lumens or color to desired output




Push clips up & install into fixture




Ensure fixture is flush. Installation is complete


New Construction Installation




Attach safety clip




Wire to j-box



Adjust lumens or color to desired output



Push clips up & install into opening



Ensure fixture is flush. Installation is complete

WARRANTY

- Five year limited warranty is standard on luminaire and components.